



Dimension : MM

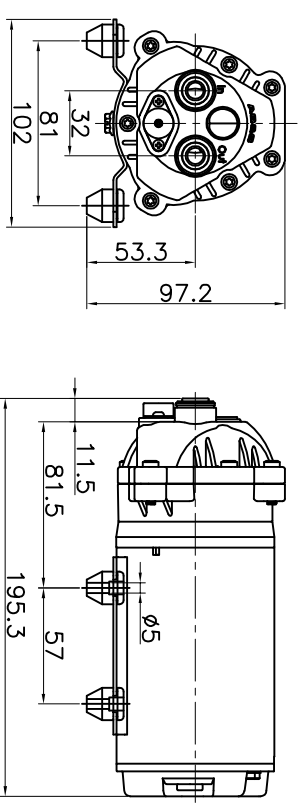

Specifications :

- ⊙ Design
 - Positive displacement
 - 3 - chamber diaphragm pump
- ⊙ Motor
 - Permanent magnet / Carbon brush
- ⊙ Voltage
 - 230 VAC nominal
- ⊙ Ports
 - 3 / 8 " Quick connect
 - 3 / 8" 、 5 / 16" 、 10mm Quick connect available
- ⊙ Material
 - Santoprene & Polyamide
- ⊙ Pressure control
 - Adjustable By-pass

FLOW CURVE

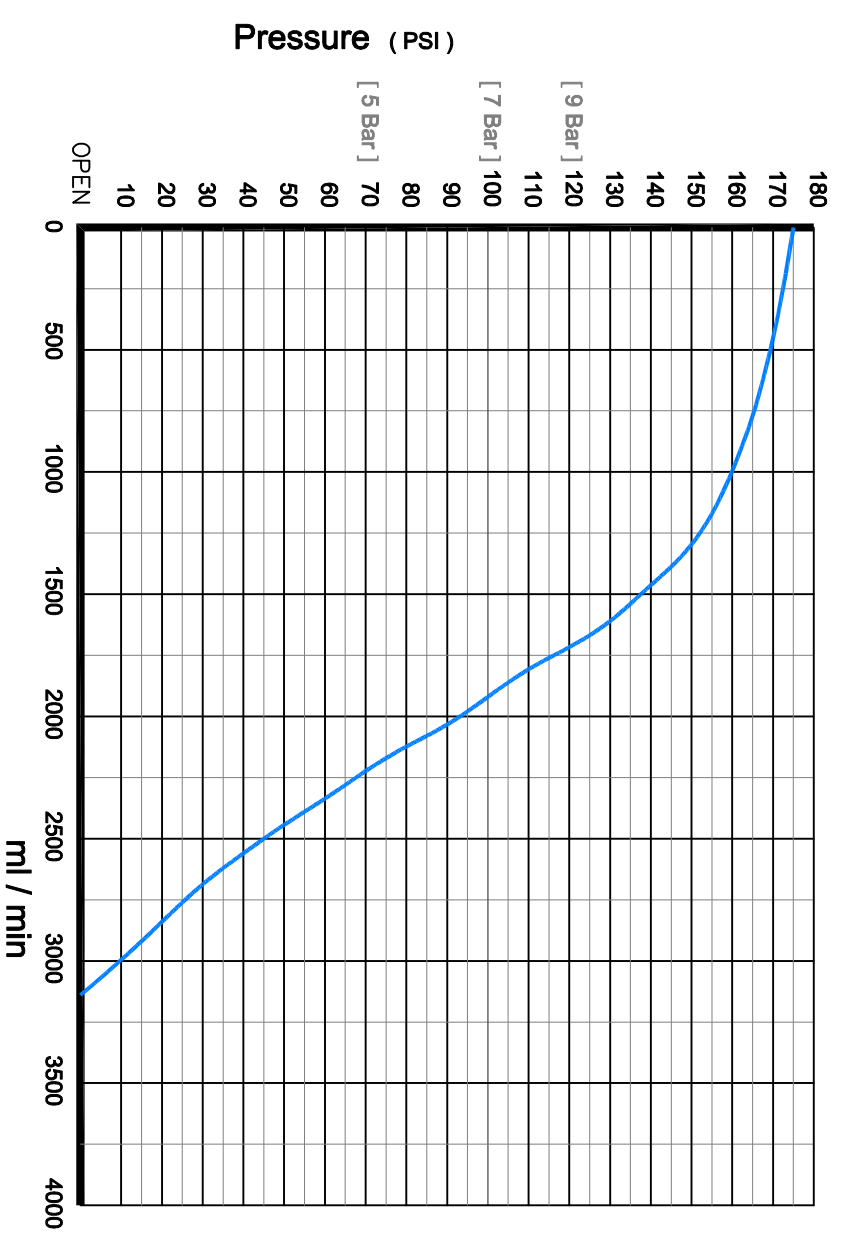

TEST CONDITION
1. TEST MODEL : 66.01.100L
2. INLET PRESSURE : 0 PSI
3. INPUT VOLTAGE : 230VAC

PRESSURE FLOW CURRENT (psi) (ml / min) (Amps)		
BY - PASS	0	
175	540	0.306
170	540	0.305
160	1040	0.302
150	1320	0.298
140	1460	0.291
130	1620	0.281
120	1720	0.272
110	1800	0.257
100	1920	0.245
90	2040	0.229
80	2120	0.213
70	2220	0.198
60	2340	0.185
50	2440	0.172
40	2560	0.159
30	2680	0.147
20	2840	0.133
10	3000	0.120
OPEN	3140	0.108