
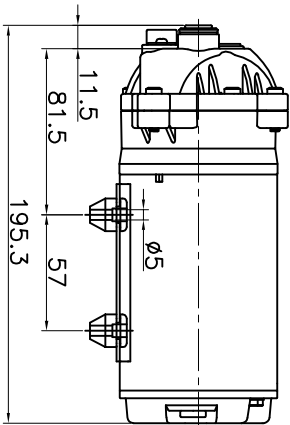



Dimension : MM



Specifications :

- ⦿ Design
 - Positive displacement
 - 3 - chamber diaphragm pump
- ⦿ Motor
 - Permanent magnet / Carbon brush
- ⦿ Voltage
 - 230 VAC nominal
- ⦿ Ports
 - 3 / 8 " Quick connect
 - 3 / 8" 、 5 / 16" 、 10mm Quick connect available
- ⦿ Material
 - Santoprene & Polyamide
- ⦿ Pressure control
 - Adjustable By-pass

FLOW CURVE

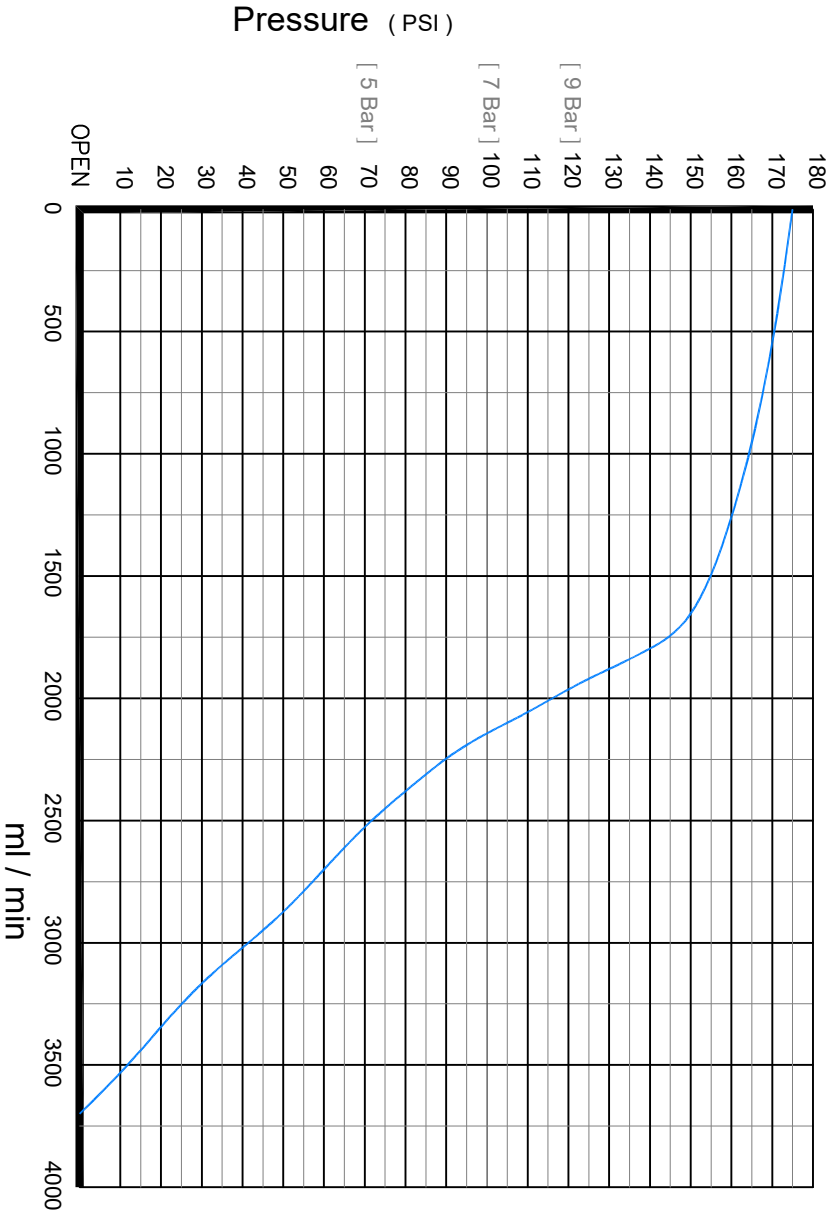

- TEST CONDITION
- 1. TEST MODEL : 66.11.150L
 - 2. INLET PRESSURE : 0 PSI
 - 3. INPUT VOLTAGE : 230VAC

PRESSURE FLOW CURRENT		
(psi) (ml / min) (Amps)		
BY - PASS	0	0.357
175	640	0.347
170	1320	0.352
160	1700	0.341
150	1800	0.329
140	1880	0.316
130	1960	0.303
120	2060	0.290
110	2140	0.277
100	2240	0.262
90	2380	0.249
80	2520	0.236
70	2700	0.223
60	2880	0.204
50	3020	0.186
40	3160	0.170
30	3340	0.153
20	3540	0.137
10	3700	0.123
OPEN		