



Dimension : MM

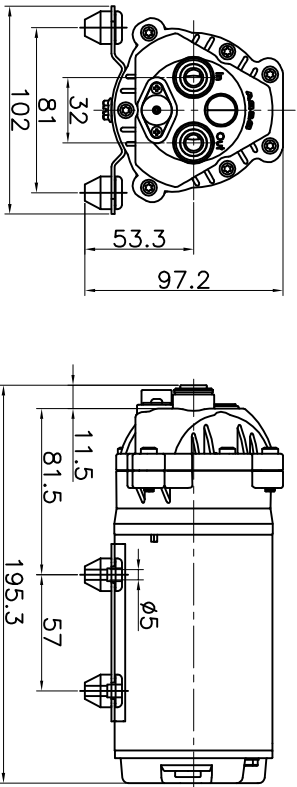

Specifications :

- ⊙ Design
 - Positive displacement
 - 3 - chamber diaphragm pump
 - Permanent magnet / Carbon brush
 - 230 VAC nominal
 - 3 / 8 " Quick connect
 - 3 / 8" 、 5 / 16" 、 10mm Quick connect available
- ⊙ Motor
- ⊙ Voltage
- ⊙ Ports
- ⊙ Material
 - Santoprene & Polyamide
- ⊙ Pressure control
 - Adjustable By-pass

FLOW CURVE

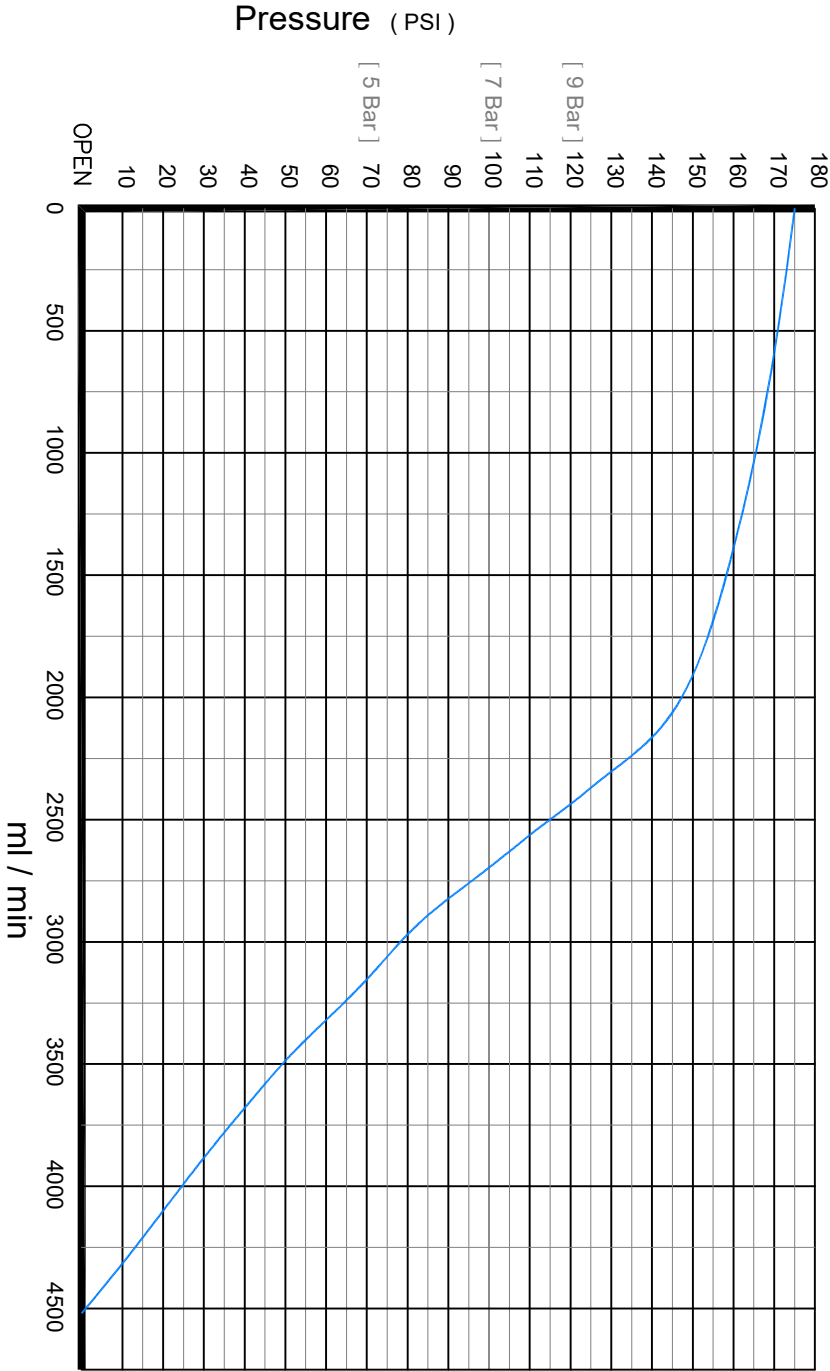

TEST CONDITION			
1. TEST MODEL : 66.21.200L			
2. INLET PRESSURE : 0 PSI			
3. INPUT VOLTAGE : 230VAC			
PRESSURE FLOW		CURRENT	
(psi) (ml / min)		(Amps)	
BY - PASS	0	0.506	
175	680	0.499	
160	1440	0.487	
150	1960	0.471	
140	2180	0.450	
130	2300	0.430	
120	2440	0.410	
110	2560	0.389	
100	2700	0.371	
90	2820	0.353	
80	2960	0.338	
70	3160	0.317	
60	3320	0.290	
50	3480	0.268	
40	3680	0.243	
30	3880	0.220	
20	4100	0.199	
10	4320	0.177	
OPEN	4520	0.161	